

TXD10005



TacoTunes TXD1000.5 5 Channel Amplifier Tuning Process

Before you begin the tuning process, please make sure all knobs & switches are in the positions provided in the diagram below.

If you are using our Ntune6 in your installation, please click here before you begin the tuning process

Toyota Ntune6 Mode Selection Diagrams

Tuning Process Video links:

2022+Toyota Tundra How to Tune tacotunes TXD10005 5 Channel

Amplifier. Plug and play amplifier easy

Tuning Calculator Link:

How to tune TXD3204 Plug and Play Amp Crossover & High Pass Filter Settings


Bass Knob

Plug in your Bass knob & make sure it is turned all the way to the right or set to "MAX"




5 Channel Switch

Make sure the "5ch/2ch" switch is set to "5CH"

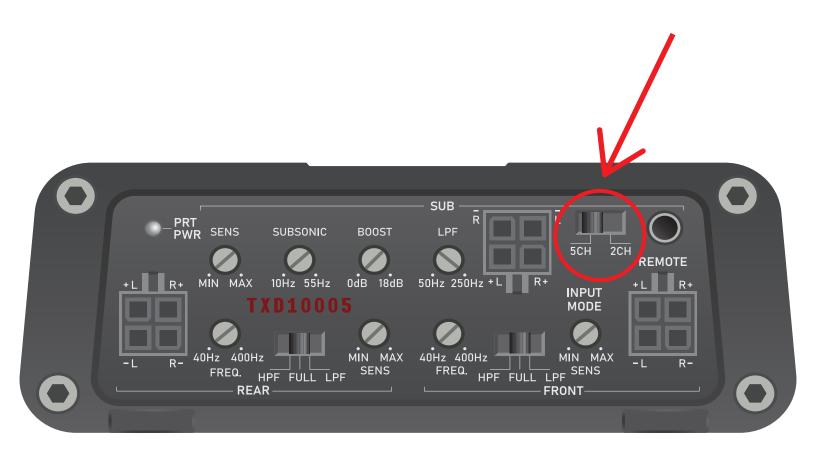


Section 1 - SENS

Turn the Front, Rear & Sub "SENS" knobs all the way to the left or the "MIN" mark.

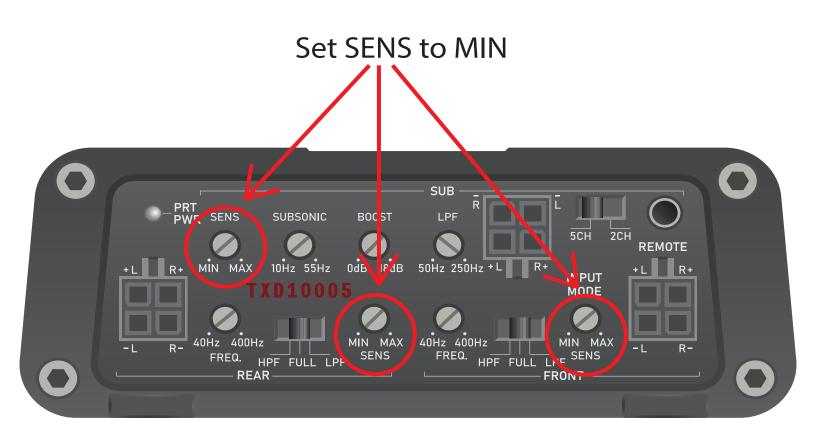

Section 2 - Subsonic

Turn the "Subsonic" knob all the way to the left or the "10hz" mark.

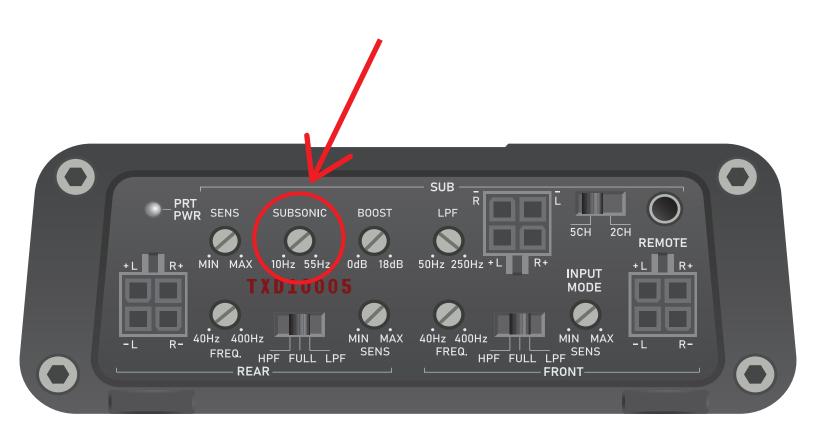


Section 3 - Boost

Turn the "Boost" knob all the way to the left or the "OdB" mark.




Section 4 - HPF/LPF

Set both your"HPF/LPF" switches in the middle or to the "FULL" position

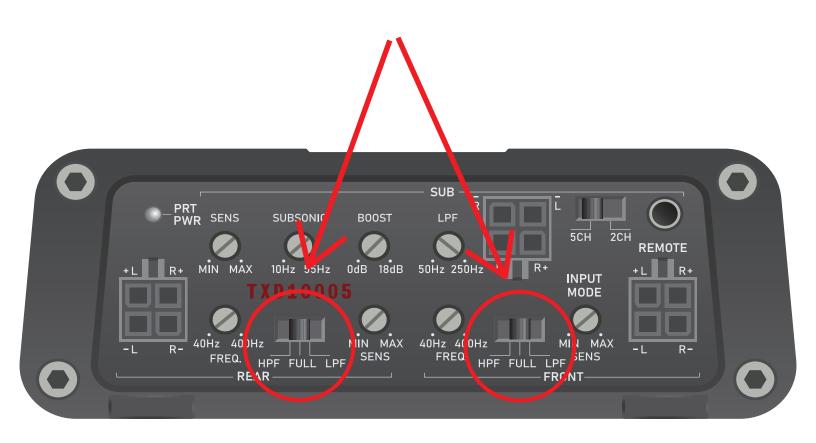

Section 5-FREQ

Turn both your"FREQ" knobs all the way to the left or to the "40Hz" position

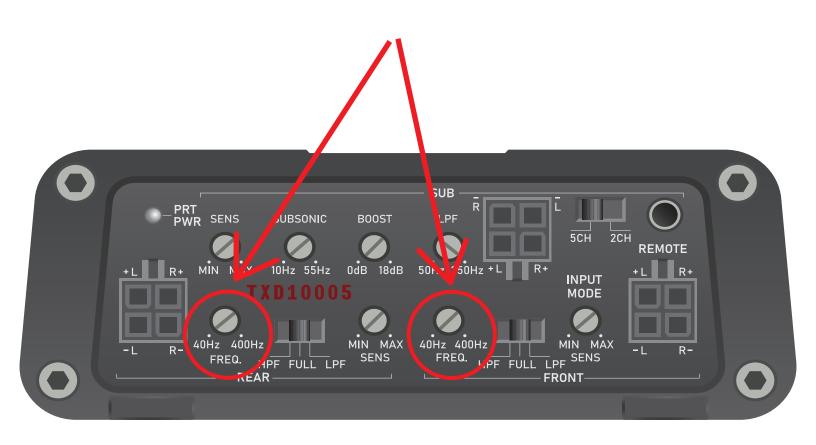

COMPLETE OVERVIEW

Plug in bass knob and set to MAX position

Set SENS to MIN Set Subsonic to 10 Hz

Set Boost to 0dB

PRT SELS SUBSONIC BOOST LPP REMOTE

TXD10005

Set FREQ. HPF FULL PF SENS

Set to FULL Set to 5CH

Set to 5CH